



LOCINOX Installation

A: INSTALL LOCK:

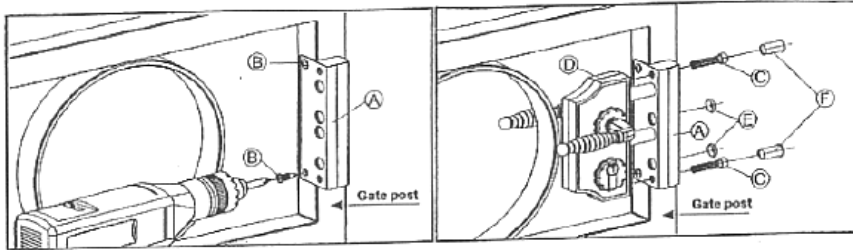

1. Place item A on desired height of gate post. With self-drilling screws B screw item A to gate post. Use drilling-machine with Phillipshead. No pre-drilling of the holes is required.
2. Now fix item D (Lock) on item A using screws C. Put item E on item A to cover holes. Put item F on item C to cover hole.

B: INSTALL KEEPER:

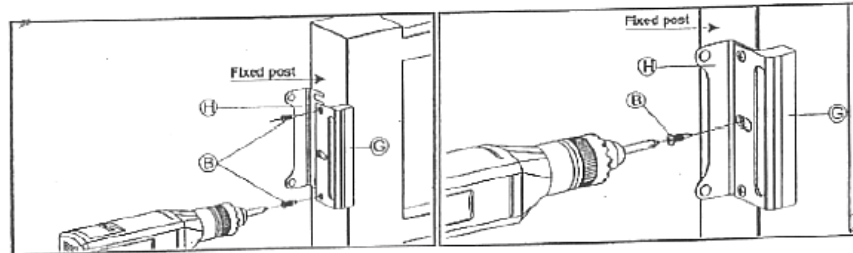

1. Place item G (Keeper) on desired height of fixed post. With self-drilling screws B screw (not too hard) item G to fixed post. Use drilling-machine with Phillipshead. No pre-drilling of the holes is required.
 Place item H (Strike-plate with gummi) between item G and fixed post.
 Adjust item G and H according to size of gate post. Tighten these firmly to fixed post.
2. To make sure that item G and H don't loosen use self-drilling screw B to secure these parts to fixed post. Use drilling-machine with Phillipshead. No pre-drilling of the holes is required.